

ADDENDUM NO. 3

June 15, 2026

This Addendum forms a part of the Contract Documents and modifies the original Bidding Documents dated May 4, 2026.

Acknowledge receipt of this Addendum (44 pages) in the space provided on the BID FORM. Failure to do so may subject the Bidder to disqualification.

The following items clarify, modify, change, delete from or add to the Contract Documents. When any paragraph, subparagraph, or sub-subparagraph thereof is modified or deleted by this Addendum, the unaltered provisions of that paragraph, subparagraph or sub-subparagraph shall remain in effect.

CLARIFICATIONS / GENERAL:

1. Prebid Question: Please Confirm whether there are prevailing wages on this project.
RESPONSE: This project does not have Prevailing Wage requirements.

2. Prebid Question
Specification Section No.: PRE-BID NOTES

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: It was stated that due to the call center, the existing building has to have electrical power at all times. Does the engineer have a suggestion as to how to accomplish this?

RESPONSE: Means and methods are the responsibility of the General Contractor. Provide schedule and sequencing for Owner Review and Approval prior to all work associated with the E911 call center.

3. Prebid Question: 008110 Supplemental General Conditions Section 9.11

INQUIRY

Bidder's Inquiry: _____

- Please advise if liquidated damages apply after substantial completion? The way we interpret this section, liquidated damages of \$200/day only apply if final completion isn't achieved within 30 days of substantial completion. Please confirm.

RESPONSE: Liquidated Damages begin at Substantial Completion. See Revisions to Specification Section 008110 Supplemental General Conditions.



4. Prebid Question

Specification Section No.: 024119-4 - C

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: Please explain, will Spectrum be considered the professional engineer or is the contractor responsible to provide?

C. [Perform][Engage a professional engineer to perform] an engineering survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective building demolition operations.

1. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.

RESPONSE: Contractor shall perform.

5. Prebid Question

Drawing Sheet/Detail Number: C102 + C501

INQUIRY

Bidder's Inquiry: On sheet C102 the West sidewalk (rear) does not indicate curb and based on the existing sidewalk should the optional Turn Down Sidewalk detail on sheet C501 be used for this area?

RESPONSE: Yes, the west parking lot sidewalk shall include the turn down.

6. Prebid Question

Drawing Sheet/Detail Number: C103

INQUIRY

Bidder's Inquiry: What type of pipe for the 4" & 6" storm drain? HDPE?

RESPONSE: 4" and 6" storm drain shall be PVC.

7. Prebid Question

Drawing Sheet/Detail Number: C501-3

INQUIRY

Bidder's Inquiry: Is this the correct detail for mechanical equipment pads?
Do you really want a turndown?

RESPONSE: Refer to specification section 230000 for mechanical equipment pad requirements.

8. Prebid Question

Drawing Sheet/Detail Number: C204

INQUIRY

Bidder's Inquiry: Will the Owner be responsible to
do RLD inspections?
Will owner be responsible for
maintenance of RLD ponds.

RESPONSE: The Contractor's RLD shall be responsible for inspections of disturbed areas. The owner will be responsible for maintenance of permanent stormwater management measures after construction is complete. Contractor shall be responsible for maintenance during construction. See sheet C204.

9. Prebid Question

Drawing Sheet/Detail Number: C201

INQUIRY

Bidder's Inquiry: Are there any connection fees?

RESPONSE: Contractor responsible for coordinating with utility providers. Plans indicate using the Owners existing services and do not anticipate connection fees.

10. Prebid Question

Drawing Sheet/Detail Number: C204

INQUIRY

Bidder's Inquiry: Are we req'd to do SWPP?

RESPONSE: Yes, a SWPPP is required for this project.

11. Prebid Question

Drawing Sheet/Detail Number: C501, detail I

INQUIRY

Bidder's Inquiry: Is all pavement to be
"heavy duty".

RESPONSE: All asphalt pavement shall match the "heavy duty" pavement section provided.

12. Prebid Question

Drawing Sheet/Detail Number: 5001

INQUIRY

Bidder's Inquiry: Who pays for "special inspections"

RESPONSE: Owner will contract Construction Testing and Inspections as well as Special Inspections.

13. Prebid Question

Drawing Sheet/Detail Number: S101, S601

INQUIRY

Bidder's Inquiry: _____
– Please provide info on F3.5 and F5.5. Information is given for F6.0 where does this
– occur?

Drawing Sheet/Detail Number: S101 + S601

INQUIRY

Bidder's Inquiry: Footings as shown on S101 doesn't match
Footings schedule on S601, please advise. ex. F3.5, F5.5 as shown
on S101 is not indicated on S601.

RESPONSE: F3.5 shall be 3'-6"x3'-6"x1'-0" with (3)#5 each way. F5.5 shall be 5'-6"x5'-6"x1'-0" with (5)#6 each way. F6.0 is not applicable.

14. Prebid Question

Drawing Sheet/Detail Number: 5103

INQUIRY

Bidder's Inquiry: Note says "Canopy by others."
Is the GC responsible to do anything
other than install footings?

RESPONSE: Canopy is by the Canopy Manufacturer and is part of the construction contract.

15. Prebid Question

Bidder's Inquiry: 1. Finish Plan and Finish Schedule do not agree on these rooms:
245,246,247 Can we get clarification please

RESPONSE:

- Interview 245 floor finish shall be LVT-4.
- Interview 246 floor finish shall be LVT-4, also the wall base shall be WB-2.
- Observation 247 floor finish shall be LVT-4.

16. Prebid Question

Drawing Sheet/Detail Number: LS001

INQUIRY

Bidder's Inquiry: LS001 references an AED, however none is shown
please advise.

RESPONSE: Provide (one) AED. Location to be determined during construction. AED basis of design: Zoll model AED plus semi-automatic external defibrillator, including AED, quickResponse kit, protective case, two batteries, Two adult defibrillation pads, wall sign, and a Theft resistant semi-recessed wall cabinet. Mount top of cabinet @ 48"

17. Prebid Question

Specification Section No.: 2.7/075420

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: _____

- Are flexible walkways required, none shown.

-

RESPONSE: Flexible walkway pads are indicated on sheet A151 Roof plan.

18. Prebid Question

Specification Section No.: 113100

Drawing Sheet/Detail Number: A711

INQUIRY

Bidder's Inquiry: Is the Contractor to provide the "UC REF" shown in detail 3? DW is reference in detail 5 in the same manner

RESPONSE: UC REF, DW, and PRINT/COPY refer to appliances by Owner.

19. Prebid Question

Drawing Sheet/Detail Number: A100, 10

INQUIRY

Bidder's Inquiry: Is there a spec for the precast bench?

RESPONSE: CONCRETE BENCH: BASIS OF DESIGN - BELSON OUTDOORS - 6' BACKLESS CONCRETE BENCH - ACID WASH FINISH - MODEL TF5026 (INCLUDE ACCESSORY TF1997 LEVELING FEET)

20. Prebid Question

Drawing Sheet/Detail Number: A701, GN-1

INQUIRY

Bidder's Inquiry: Please identify what is meant by "Premium" colors.
Can the SF extent be provide?

RESPONSE: Revise General Note GN-1 to read "ACTUAL FINISH COLORS AND PATTERNS WILL BE SELECTED DURING CONSTRUCTION ADMINISTRATION FROM THE PROVIDED MANUFACTURER'S FULL RANGE."

21. Prebid Question

Drawing Sheet/Detail Number: A 411

INQUIRY

Bidder's Inquiry: On the above drawing there
is not a sump or ladder. Elsewhere,
there are details for both. Are we to
provide light fixture in pit and top of shaft?
Are we to provide these?

RESPONSE: Sump Pit with sump pump, ladder and lighting are required to be included as part of the contract documents. See A401 for ladder, plumbing specs for sump pump, and electrical drawings for lighting at pit and top of shaft.

22. Prebid Question

Drawing Sheet/Detail Number: A 601 - Walk off

INQUIRY

Bidder's Inquiry: Are we to recess the slab
for the walk off mat.

RESPONSE: Recess is not required for walk-off carpet.

23. Prebid Question

Specification Section No.: 2.5/077200

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: _____

– The spec calls for an Automatic Roof Fire Vent, where does this occur?

RESPONSE: Automatic roof fire vent not required. DELETE section 077200 2.5.

24. Prebid Question

Specification Section No.: 088610

Drawing Sheet/Detail Number: A101,A601, A201

INQUIRY

Bidder's Inquiry: _____

- The windows containing security and safety glazing film is not clear. Please confirm -
- window types SX03 and SX06 are the only ones to have the glazing film -

RESPONSE: All glazing indicated as type GL-3 (spandrel glass) should instead be GL-6 (insulated glass with security film.) This includes elevations SF 01, SX 03, and SX 06. There is no GL-3 (spandrel glass) on this project.

25. Prebid Question

Drawing Sheet/Detail Number: A121

INQUIRY

Bidder's Inquiry: _____

- Rooms 245,246, and 205 have conflicting labels for the ceiling finish. Please
- advise.

RESPONSE:

Interview 245 Ceiling Finish shall be GWB at 9'-0" AFF.

Interview 246 Ceiling Finish shall be GWB at 9'-0" AFF.

Interview 247 Ceiling Finish shall be GWB at 9'-0" AFF.

Fingerprint 248 Ceiling Finish shall be GWB at 9'-0" AFF.

26. Prebid Question

Specification Section No.: 102800

Drawing Sheet/Detail Number: A401, A101

INQUIRY

Bidder's Inquiry: _____

- What bath accessories are required, if any, in the newly created restroom 218A

RESPONSE: Provide one 18x36 mirror (MR1); one roll paper towel dispenser (PT2); one soap dispenser (SD1); one toilet paper dispenser (TP1).

27. Prebid Question

Specification Section No.: 064100

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: _____

– **May we comply with AWI standards, but not have certification?**

–

RESPONSE: Casework shall comply with AWI standards. Certification is not required.

28. Prebid Question

Drawing Sheet/Detail Number: Sheet A004

INQUIRY

Bidder's Inquiry: this sheet is missing from the documents. will it be issued by addenda?

RESPONSE: Drawing Sheet A004 is not part of contract documents. Revise Sheet Note A91 to read as follows: COLONNADE - SEE A100 FOR DETAILS.

29. Prebid Question

Specification Section No.: 104310

Drawing Sheet/Detail Number: A702

INQUIRY

Bidder's Inquiry: _____

– Sheet A702 shows typical room signage shown at restrooms where I would expect to see types D and E, please advise.

–

RESPONSE: Provide Sign type D at doors T105 and T205. Provide sign type E at doors T104 and T204. Provide sign type J at door T206 (below).



J

30. Prebid Question

Specification Section No.: 074110

Drawing Sheet/Detail Number: A002

INQUIRY

Bidder's Inquiry: Sheet A002 provides the roof Assemblies, in reviewing the specifications 074110, Page 14, item 3.5-A-1 indicates the Board Insulation is to be held in place with Z shaped furring. This is not shown in the roof assemblies. Is this required?

RESPONSE: Z furring not required at metal roof panel insulation. At roof Assemblies RA-2 and RA-3, provide 1/2" plywood in lieu of 1/2" coverboard.

31. Prebid Question

Specification Section No.: 074110

Drawing Sheet/Detail Number: A002

INQUIRY

Bidder's Inquiry: On both metal roof Assemblies RA-2, RA-3 it calls for a layer of 1/2" insulated coverboard. The insulated coverboard is a denser insulation used on membrane roofs for foot traffic. Using this on a metal roof assembly would require the use bearing plates at the cleats and long screws to attach to the metal deck. These long screws become a problem over time as the metal expands + contracts. As such would 1/2" Plywood be acceptable in order to shorten the screws from the roof panels into plywood versus screws from the roof panel into the decking?

RESPONSE: At roof Assemblies RA-2 and RA-3, provide 1/2" plywood in lieu of 1/2" coverboard.

32. Prebid Question

Specification Section No.: 113100

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: _____

- Are the ice maker in room 120 and under counter refrigerator in room 108 part of
- the GC scope? If so, please provide product specifications.

RESPONSE: Ice maker is existing and is to be relocated from the existing break room to the new break room. Under counter refrigerator in room 108 is to be contractor furnished, contractor installed.

Under counter Refrigerator basis of design:

1. Refrigerator: 4.3 cu ft.
2. Dimensions: 21" w x 21" d x 32.5" h (verify dimensions with counter height)

3. Manufacturer: Subject to compliance with requirements, provide products of one of the following:
- a. Black and Decker
 - b. General Electric
 - c. Frigidaire

33. Prebid Question

Specification Section No.: 123661

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: _____

- Please select edge treatment for the quartz for bidding purposes, as there is a wide
- range of pricing.

RESPONSE: Quartz edge to be eased.

34. Prebid Question

Drawing Sheet/Detail Number: E301

INQUIRY

Bidder's Inquiry: _____ Notes on plan E301 indicate that there is an existing Aiphone door station to be moved to outside vestibule V201 and a new Aiphone door station to be installed outside vestibule V202.

_____ Notes also state that both are to be monitored at Reception 242, however, no master station is specified for this location and the door intercom station specified in the door hardware schedule is discontinued.

_____ Please indicate if the security contractor should furnish all new equipment, two door stations and one master, and if this should be upgraded to an IP system?

RESPONSE: Contractor shall furnish and install a new AI phone station at V201 and new AI phone station at V202. AI phone station basis of design AIPHONE model JP-DVF.

Contractor shall furnish and install new answering station in room 242. Answer station basis of design: AIPHONE model JP-4MED

35. Prebid Question

Drawing Sheet/Detail Number: E301

INQUIRY

Bidder's Inquiry: _____ Should new data cables in the existing building route to the new IDF or the existing server room. If the server room, please clarify if this is room 112 or 114?

RESPONSE: All new cables shall route to Room 112.

36. Prebid Question

Specification Section No.: 272000.1.04B and 272000.2.02A

Drawing Sheet/Detail Number:

INQUIRY

Bidder's Inquiry: Please confirm if the 12-strand fiber and 25-pair copper specified in sections 272000.1.04B and 272000.2.02A are required between Server Room 112 and/or 114 and IT M103?

RESPONSE: All new cables shall route to Room 112.

37. Prebid Question

Specification Section No.: 272000.2.02.A.1c

Drawing Sheet/Detail Number:

INQUIRY

Bidder's Inquiry: Please confirm that the 25-pair backbone cable is to be Cat5e, as specified in section 272000.2.02.A.1c (General 2131550E), and not Cat3, which is more typical?

RESPONSE: Per Bedford County, the 25-pair distribution cable is not needed. Delete specification section 27200, 2.02, A., 1., c.

38. Prebid Question

Specification Section No.: 272000.2.02.A.3

Drawing Sheet/Detail Number:

INQUIRY

Bidder's Inquiry: Please specify the quantities of patch cables, specified in Section 272000.2.02.A.3, to be furnished.

RESPONSE: *Response from Bedford:*

Regarding the question about required patch cables: if this is being managed as part of the current project scope, we will need one patch cable for every LAN drop running back to the switch closet.

Our Preferred Patching Methodology: To ensure the new closet remains clean and easy to maintain, our standard approach relies on a specific rack layout and short cable runs:

- Equipment Layout: We prefer to interleave the patch panels and network switches within the rack (e.g., alternating patch panel, switch, patch panel).
- Cable Specifications: We utilize short, 6–10" patch cables.
- Patching Execution: As explicitly illustrated in the reference attached image, each terminated port on the patch panel must connect directly to the adjacent switch port immediately above or below it.

This 1-to-1 vertical patching strategy eliminates excess cable slack, removes the need for bulky horizontal cable managers, and keeps ongoing management much more straightforward.

39. Prebid Question

Specification Section No.: 262726.2.3.A.1

Drawing Sheet/Detail Number: E301

INQUIRY

Bidder's Inquiry: Eight data cables are indicated per Pokethru 'P1' locations on plan E301; however, the Wiremold RC4 series devices specified in section 262726.2.3.A.1 only appear to accommodate up to four data jacks. Please clarify requirements.

RESPONSE: To accommodate the (8) data jacks and (2) duplex receptacles, provide Legrand Evolution Series 6" Poke-Thru Floor Box [6AT with 6ACT8A 8-port data mounting plate or equal.

40. Prebid Question

Bidder's Inquiry: Plan 301 shows extensive sleeving on the ground floor for low-voltage cabling to be installed by the EC but very little on the 1st floor. Will it be the responsibility of the low-voltage contractor to install additional sleeves where needed on the 1st floor?

RESPONSE: The majority of the interior walls on the 1st floor do not extend to the deck, like they do on the ground floor. So, there are very little sleeves on the 1st floor.

41. Prebid Question

Specification Section No.: 272000.2.02.A.2

Drawing Sheet/Detail Number:

INQUIRY

Bidder's Inquiry: The Cat6 cable specified in section 272000.2.02.A.2, General Cable 7131800, is discontinued, replaced by 7131100. Please confirm that this replacement is acceptable.

RESPONSE: The proposed cable is acceptable.

42. Prebid Question

Specification Section No.: 282000.1.03 & 282000.2.02C

Drawing Sheet/Detail Number: E301

INQUIRY

Bidder's Inquiry: Please clarify whether the video surveillance system equipment is owner or contractor installed?
The notes on plan E301 state 'Cameras: OFCI', and specification section 282000.1.03 states 'Install and test all of the Owner provided CCTV equipment'.
Conversely, specification section 282000.2.02C states 'Owner's forces shall provide and install the cameras, camera mounts, CCTV equipment and software'.

RESPONSE: Sheet E301 indicates Cameras to be provided by Owner and Contractor to install. On Sheet E301 it also indicates that there is no Head-end/NVR required. Each camera uses local storage with cloud based uploading. Owner will handle Verkada cloud licensing. Spec section 282000, 1.03, refers to Contractor installing

Owner furnished CCTV equipment, which is just the Camera. Contractor to install the cameras, wire them, and test the wiring.

43. Prebid Question


Drawing Sheet/Detail Number: E602

INQUIRY

Bidder's Inquiry: _____

– Is the manufacturer/model/part number of the existing MDP available?

RESPONSE: The MDP manufacturer is Square D. The model number is unavailable. Catalog # of 200 Amp breaker is: Q232200H. Photos of the existing breakers are below.

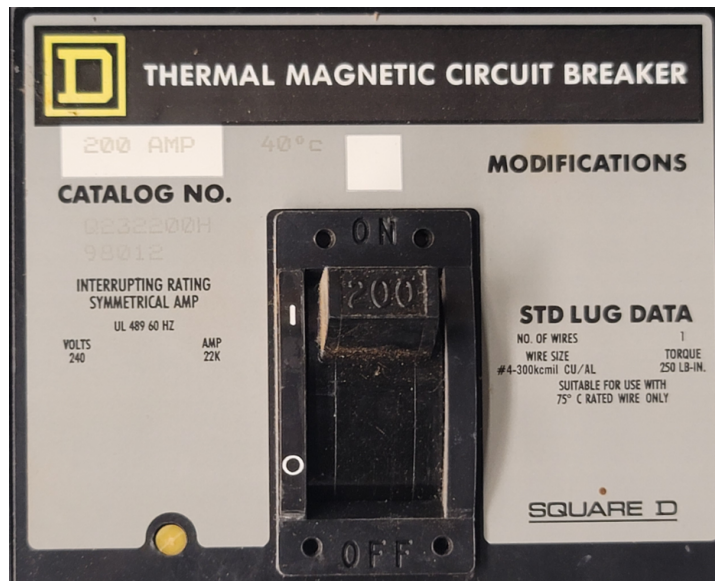

44. Prebid Question

Bidder's Inquiry: _____ Plan Note #18 on plan E301 states that data drops in new walls on the first floor of the existing building are to stub to the ceiling below.

_____ Will there be any limitations on access to the areas below, including room 109? _____

RESPONSE: Access to Rooms 104, 105, 106, 109, and 114 will be tightly controlled and access to these areas will require coordination with the Owner. All work within the lower level must be coordinated with the Owner to ensure 100% operation of E911 call center.

45. Prebid Question

Specification Section No.: 2.3/129300

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: _____

– The spec references a bicycle rack. None are shown, please advise.

–

Specification Section No.: 129300

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: Is there a bike rack?

Specification Section No.: 129300

Drawing Sheet/Detail Number: _____

INQUIRY

Bidder's Inquiry: Specification 129300, item 2.3 please advise where these go and how many.

RESPONSE: No bicycle rack required. Delete section 129300 2.3 BIKE RACK

46. Prebid Question

1. Question – Can service disconnects be incorporated into the design?

Closed transition/Svc Ent Rated ATS's are very expensive, physically large and will require the utility to be involved with any ATS repairs or maintenance. They also may need to be approved by the utility as they momentarily parallel with utility power.

RESPONSE:

- To minimize the size the electrical equipment yard and the number of pieces of equipment out there the owner has to maintain, the ATS are specified as SER.
- The design is calling for closed transition ATS's because the gear if feeding not just a Sheriff's Office, but also a 911 Call Center, so we need to limit the lost of power to these critical systems on the transfer from generator to normal power.
- The equipment is all located outside in the electrical equipment yard, which is shown on the electrical plans, so physical size is not an issue as long as it is coordinated with the other equipment in the electrical equipment yard.

47. Clarification: Masonry control joints shall be placed at 30' on-center and approximately 15' from corners. Architect will provide control joint locations. No joints shall be placed without the Architect's approval.

SPECIFICATIONS:

1. 008110 SUPPLEMENTAL GENERAL CONDITIONS

A. REVISE Section 9.11.1 as follows:

9.11 – LIQUIDATED DAMAGES

9.11.1 The Contractor acknowledges that 'Time is of the Essence' and agrees that the Work must be Substantially Complete with all building systems fully operational and an Occupancy Permit obtained no later than the Substantial Completion date and the Work must be Finally Complete no later than thirty calendar (30) days after the Substantial Completion date (the 'Final Completion date').

If the Contractor fails to substantially complete the work by the substantial completion date as stated herein, the Contractor shall be liable to the Owner for liquidated damages for each calendar day of delay until the work is substantially complete as follows:

\$200/day beyond the initial Substantial Completion date as set forth in the Contract or as changed by Contract Modifications.

In addition to the above, if the Contractor fails to have all work under the project finally complete within 30 days after the initial Substantial Completion date as set forth in the Contract or as changed by Contract Modifications, the Contractor shall be liable to the Owner for liquidated damages in the amount of \$200/day for each calendar day of delay until Final Completion.

An executed Certificate of Substantial Completion does not constitute a modification to the Substantial Completion date as set forth in the Contract.

2. 016000 PRODUCT REQUIREMENTS:

- A. REVISE Section 2.1.A.6.a to eliminate reference to Construction Manager.
- B. DELETE Paragraph 2.1.B.7.a.
- C. DELETE Paragraph 2.1.E.
- D. REVISE Section 2.1.B items 1 through 6 as follows:

Product Selection Procedures:

1. Sole Product: Where Specifications name a single manufacturer and product, provide the named product that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
 2. Sole Manufacturer/Source: Where Specifications name a single manufacturer or source, provide a product by the named manufacturer or source that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
 3. Limited List of Products: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will be considered unless otherwise indicated.
 - a. Limited list of products may be indicated by the phrase "Subject to compliance with requirements, provide one of the following."
 4. Non-Limited List of Products: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed or an unnamed product that complies with requirements.
 - a. Provision of an unnamed product is not considered a substitution, if the product complies with requirements.
 - ▲ 5. Limited List of Manufacturers: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will be considered unless otherwise indicated.
 - a. Limited list of manufacturers is indicated by the phrase "Subject to compliance with requirements, provide products by one of the following."
 6. Non-Limited List of Manufacturers: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed or a product by an unnamed manufacturer that complies with requirements.
 - a. Provision of products of an unnamed manufacturer is not considered a substitution, if the product complies with requirements.
3. 211000 FIRE SUPPRESSION SYSTEMS:
- A. REVISE 1.4.A.4.e:
- e. Data on these working plans shall include, but not be limited to, the following: Requirements listed in NFPA 13-2019 - Sprinkler Systems, size of all piping; method of anchoring or hanging pipe lines; location and type of valves; position, type, and temperature ratings of sprinkler heads; material and equipment list indicating manufacturer's names and types; structural, mechanical, electrical, and architectural coordinating information; and the various other items pertinent to the complete installation of the systems. Seismically brace piping system in accordance with NFPA 13-2019. Seismic design data is as follows: Seismic Design Category: C; Risk Category: IV.

4. 230548 VIBRATION AND SEISMIC CONTROLS FOR HVAC:
 - A. ADD section in its entirety.
5. 260548 SEISMIC PROTECTION FOR ELECTRICAL EQUIPMENT:
 - A. ADD section in its entirety.
6. 282000 ELECTRONIC SURVEILLANCE SYSTEMS
 - A. REVISE paragraph 2.02C: "Install and test all components of the cable for the Owner's CCTV system. Owner to provide Verkada cloud licensing, configuration, user access, and analytics."

DRAWINGS:

1. S101 – FOUNDATION PLAN
 - A. ADD note to elevator foundation to say "24"x24"x24" DEEP ELEVATOR SUMP PIT W/ 8" THICK CONC SLAB. BEND ALL REINF INTO SUMP PIT SLAB. COORD LOCATION WITH ARCHITECT PRIOR TO CONSTRUCTION."
2. S102 - FLOOR FRAMING PLAN:
 - A. REVISE note at stair to say "OPEN FOR STAIRS (BY STAIR MANUF.). Stairs are to be provided as part of the contract."
3. S103 - ROOF FRAMING PLAN:
 - A. REVISE note at canopy to say "MANUFACTURED ALUMINUM CANOPY BY CANOPY MANUFACTURER. SEE ARCH." Canopies are to be provided as part of the contract.
 - B. REVISE Keynote H to say "MECHANICAL SCREEN (SEE ARCH)...." Mechanical screens are to be provided as part of the contract.
4. A321 – WALL DETAILS:
 - A. REPLACE Sheet in its entirety.
5. E101 – FLOOR PLANS – LIGHTING:
 - A. REPLACE Sheet in its entirety.
6. E102 – LIGHTNG CONTROLS – SEQUENCE OF OPERATIONS:
 - A. REPLACE Sheet in its entirety.
7. E603 – NEW ELECTRICAL PANELS:
 - A. REPLACE Sheet in its entirety.

END OF ADDENDUM